



18-DEC-2007 DGN File: L:\Standard Drawings\Imperial\2008\Approved\Signs (SN)\SN07A.dgn


SINGLE SUPPORT SIGNS

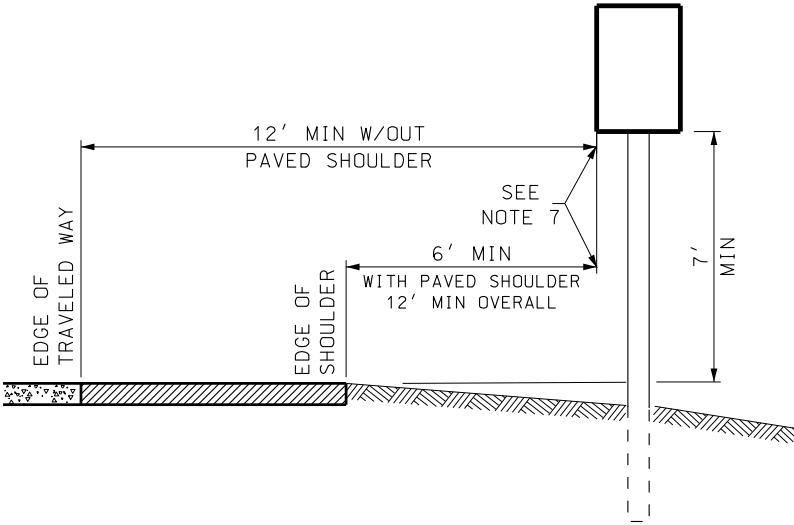


W/O SUPPLEMENTAL SIGN

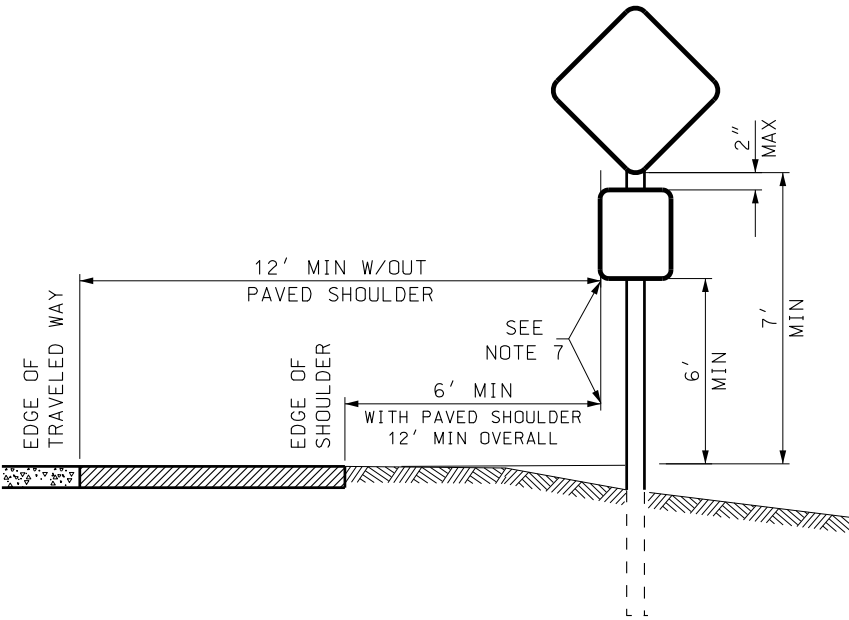

W/SUPPLEMENTAL SIGN

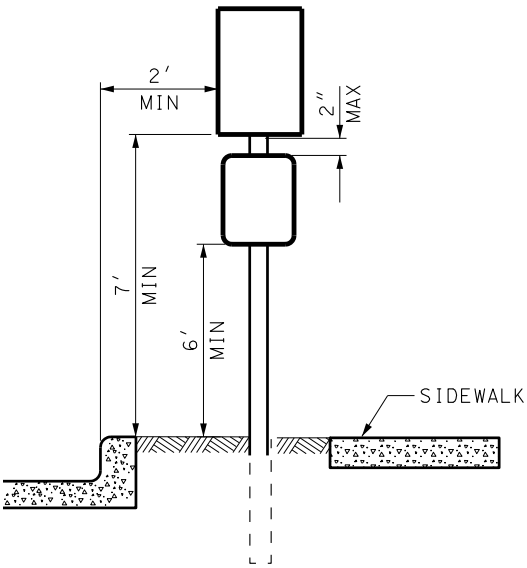


W/CURB & GUTTER

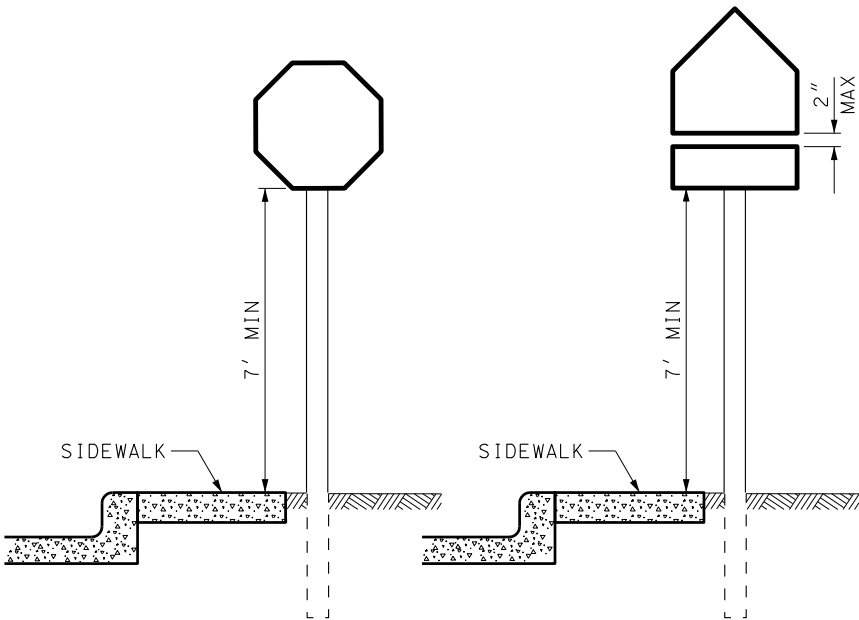

OVER PEDESTRIAN
OR BICYCLE MOVEMENT

SEE NOTE 5

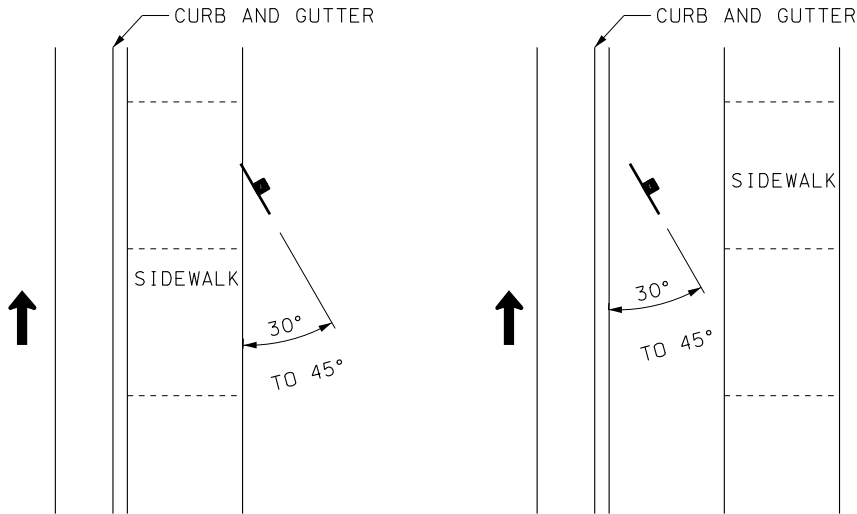

BEHIND
ADJACENT SIDEWALK

BEHIND
CURB & GUTTER

PARKING SIGNS
SEE NOTE 6

NOTES:

1. MINIMUM MOUNTING HEIGHT FOR SIGN ASSEMBLY IS THE BOTTOM OF THE PRIMARY SIGN WHEN THERE IS NOT A SUPPLEMENTAL SIGN, OR THE BOTTOM OF THE SUPPLEMENTAL SIGN WHEN USED.
2. WHEN SIDEWALK IS ADJACENT TO CURB AND GUTTER, PLACE SIGN BEHIND SIDEWALK AT 7 FOOT MINIMUM HEIGHT.
3. ON CONVENTIONAL ROADS IN RURAL AREAS, MINIMUM SIGN HEIGHT MAY BE REDUCED TO 6 FEET MINIMUM EXCEPT IN LOCATIONS OVER PEDESTRIAN OR BICYCLE MOVEMENTS.
4. SIGN MINIMUM MOUNTING HEIGHT IS SHOWN. MAXIMUM MOUNTING HEIGHT IS 1 FOOT ABOVE MINIMUM MOUNTING HEIGHT.
5. MAINTAIN ADA REQUIREMENTS WHEN INSTALLING SIGN WITHIN SIDEWALK.
6. WHEN PARKING REGULATION SIGNS ARE USED, PLACE SIGNS AT AN ANGLE NOT LESS THAN 30 DEGREES NOR MORE THAN 45 DEGREES WITH THE LINE OF TRAFFIC FLOW IN ORDER TO BE VISIBLE TO APPROACHING TRAFFIC.
7. USE A MINIMUM SIGN OFFSET DISTANCE OF EITHER THE 12' OFFSET FROM THE EDGE OF THE TRAVELED WAY, OR THE 6' OFFSET FROM THE EDGE OF THE PAVED SHOULDER, WHICHEVER IS GREATER.

UTAH DEPARTMENT OF TRANSPORTATION

STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION

SALT LAKE COUNTY

RECOMMENDED FOR APPROVAL

CHAIRMAN STANDARDS COMMITTEE

APPROVED

DEPUTY DIRECTOR

PLACEMENT OF
GROUND MOUNT SIGNS

STANDARD DRAWING TITLE

STD DWG
SN 7A

REVISIONS

NO. DATE APPR. REMARKS